


三相誘導電動機


THREE-PHASE INDUCTION MOTOR

出力 OUTPUT	形 TYPE	式 FORM	定 格 RATING	電 圧 VOLTAGE (V)	周 波 数 FRQ. (Hz)	同期回転速度 SYNC. SPEED (min ⁻¹)	極 数 POLES	耐熱クラス TH. CLASS	質 量 MASS (kg)
30HP	TFOA	LKK	S1	380/415	50	3000	2	F	
25HP	TFOA	LKK	S1	380/415	50	1500	4	F	
30HP	TFOA	LKK	S1	380/415	50	1500	4	F	
20HP	TFOA	LKK	S1	380/415	50	1000	6	F	

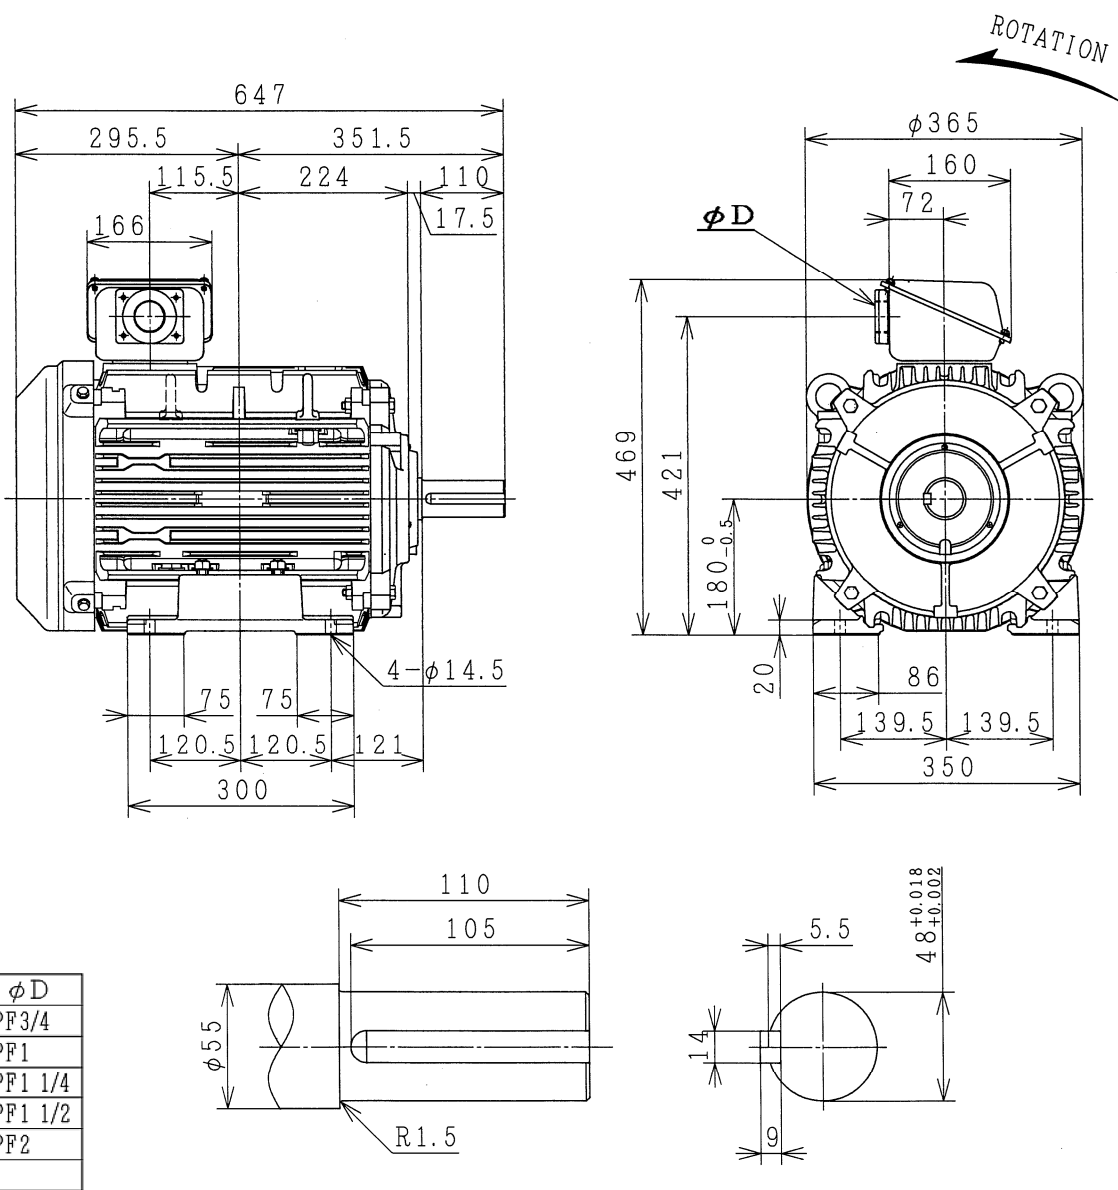

PROTECTION: IP55

PROJECTION



CUSTOMER

QTY.

ORDER No.

WORK No.	
----------	--

REV.

DWN.	W. Sutthiluk	07-Mar-2024
------	--------------	-------------

CHKD.	S. Pitsunyan
-------	--------------

APPD.	N. MICHAEL
-------	------------

DIMENSIONS

HITACHI
Hitachi Industrial Technology (Thailand), Ltd.

HITT WORKS DWG. No.

SH.

4HTD05802

FRAME	SIZE
1	10
2	10
3	10
4	10
5	10
6	10
7	10
8	10
9	10
10	10
11	10
12	10
13	10
14	10
15	10
16	10
17	10
18	10
19	10
20	10
21	10
22	10
23	10
24	10
25	10
26	10
27	10
28	10
29	10
30	10
31	10
32	10
33	10
34	10
35	10
36	10
37	10
38	10
39	10
40	10
41	10
42	10
43	10
44	10
45	10
46	10
47	10
48	10
49	10
50	10
51	10
52	10
53	10
54	10
55	10
56	10
57	10
58	10
59	10
60	10
61	10
62	10
63	10
64	10
65	10
66	10
67	10
68	10
69	10
70	10
71	10
72	10
73	10
74	10
75	10
76	10
77	10
78	10
79	10
80	10
81	10
82	10
83	10
84	10
85	10
86	10
87	10
88	10
89	10
90	10
91	10
92	10
93	10
94	10
95	10
96	10
97	10
98	10
99	10
100	10

TF0AL-180M (TMHD)